

RAD-SEAL

by **timloc**

Face-fix radiator pipe guide and seal to eliminate potential air leakage and heat loss at vulnerable through-wall radiator pipe work entry points

Product Code: 2221

Use

- At the point of entry of through-wall 10mm plastic radiator pipework
- Within all wall constructions that present a concealed pipe void including:
 - Studded dry lined walls
 - Plaster dab slab walls

Features and benefits

- Contributes to Part L's required air leakage performance
- Protects the pipework and plaster from direct chafing
- Straight-forward and quick face fix installation
- Projects by just 25mm from the wall
- Securely positions the pipework into the required direction for connection
- Eliminates pipework kinking

Quality

- Manufactured to BS EN ISO 9001 and BS EN ISO 14001
- Helps to meet:
 - Building Regulation Document Part L - Conservation of Fuel and Power
 - Building Regulation Document Part E - Resistance to Sound


Material and Colour Choice

- Main unit body - white Polypropylene
- Gasket seal entry and seals - light grey Thermoplastic Elastomer


Technical Considerations

- Accepts routed pipework from:


A. Ground floor routing

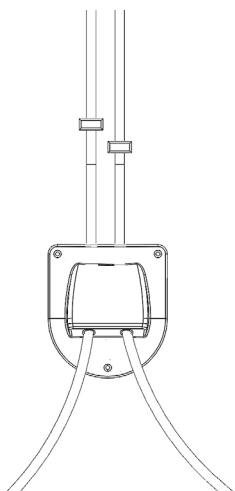


B. Horizontal routing

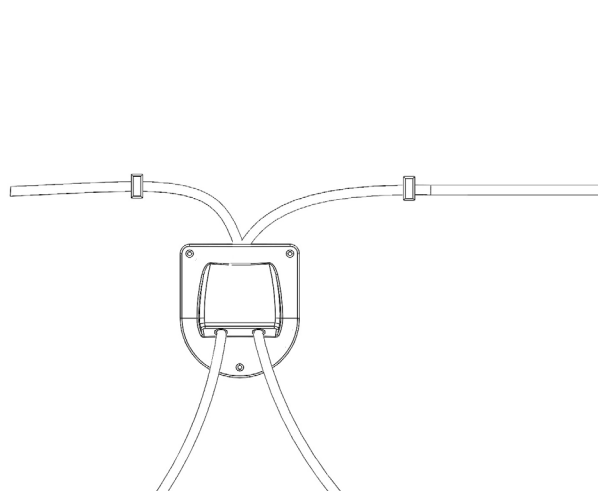


C. Upper floor routing

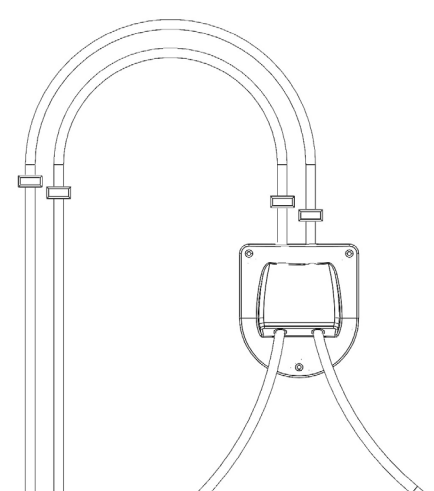

Front elevation

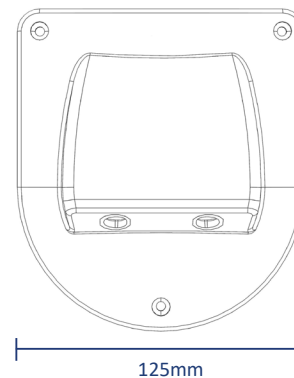

Side elevation



Installation Advice

- Please refer to our website www.timloc.co.uk for full recommended installation guidance

Product Code

Description	Height	Width	Box Quantity	Product Code
Rad-Seal Face-Fix	140mm	125mm	20	2221