

# 1201 Top Hat

Top hat collar for sealing telescopic underfloor vent

## Use

- Top hat collar for sealing telescopic underfloor vent
- When gas protection is required
- Suitable for Radon, Hydrocarbon, Methane and CO2

## Features and Benefits

- Preformed mouldings eliminate the need for site fabrication to prevent errors through poor workmanship
- Easy to handle, flexible, tough, durable and puncture resistant
- Manufactured to fit Timloc 1201 & 1201XL

## Quality

- Satisfies all NHBC requirements
- Manufactured to BS EN ISO 9001-2015
- Complies with all relevant Building Regulations
- Meets all relevant British Standard

## Material and Colour Choice

- Manufactured from medium-density polyethylene (MDPE)
- Available in black only

## Installation Advice


- Cut DPC / cavity trays to work around telescopic underfloor vent
- Separate top and bottom sections of 1201 telescopic vent and slot 1201 top hat over either half
- Position 1201 top hat to required position to sit over DPC / cavity tray
- Unit will require tape seal for gas barrier - Tape sold separately
- Use gastite G-Tape01 to make seal around full flat base surface
- Use girth tape G-tape02 to seal upstand to 1201 telescopic vent

## Dimensions

- 425mm x 257mm x 60mm (H x W x D)

## How To Order

- Order as each
- State product code

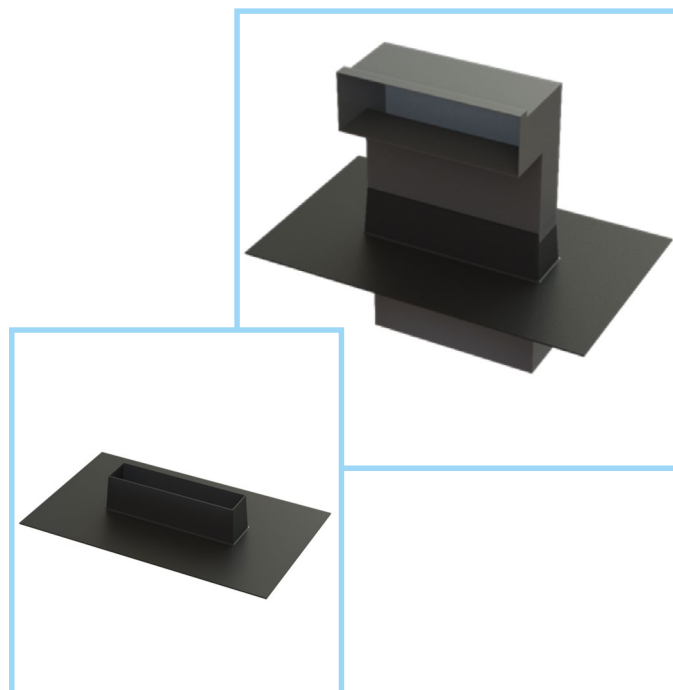

## Product Code

Description	Colour	Product code
1201 top hat	Black	77120
Gastite sealing tape 15m x 100mm	-	GTAPE01
Girth tape 75m x 50mm	-	GTAPE02

## Product Dimensions

