

FELT SUPPORT TRAY DATASHEET

Designed to prevent damage to roofing felt

Use

- At the eaves of a roof to support and protect roofing felt.
- For remedial work to replace worn or perished roofing felt.

Features & Benefits

- Effective, quick and easy to fit.
- Improves performance of other roofing materials.
- Ideal for remedial work.
- Durable and totally resistant to decay.
- Supplied in convenient 1.5m lengths or 600mm.

Quality

- Satisfies all NHBC requirements.
- Manufactured to BS EN ISO 9001 and BS EN ISO 14001.
- Complies with all relevant Building Regulations.
- Meets all relevant British Standards.

Material & Colour

- Extruded in UPVC.
- Available in black/dark grey.

How to Order

- Measure the overall length of the eaves to be protected and divide by 1.35m to determine the number of protectors required or 450mm (1128).

Product Codes

Description	Length	Colour	Pack Quantity	Lead Time	Product Codes
Felt support tray	600mm	Black/Dark Grey	20	Next Working Day	1128
Felt support tray	1500mm	Black/Dark Grey	10	Next Working Day	3017

Description	Length	Colour	Pallet Quantity	Lead Time	Product Codes
Felt support tray	1500mm	Black/Dark Grey	1000 (unbagged)	Next Working Day	4017




Bill of Quantity

G20 Carpentry/Timber Framing/First Fixing

Clause 900^ | EAVES SOFFIT VENTILATION

- Manufacturer: Timloc Building Products, Timloc House, Ozone Park, Howden, East Yorkshire, DN14 7SD. T: 01405 765567 W: www.timloc.co.uk
- Product Reference: 3017
- Type: Protector (1500mm)
- Colour: Black

Product Dimensions

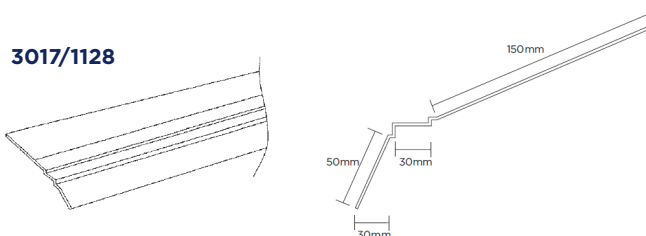

Installation Advice

- Fit on the top of the fascia board below roofing felt, allowing a 150mm overlap where pieces join.
- Secure with clout nails and fold back the rear flap to rest on the rafters.