


# Thermo-LOC

# FR60 150+

## 60-minute fire-rated cavity closer

Fire rated barriers for eliminating damp and cold bridging around doors, windows and sills for cavities over 150mm up to 300mm

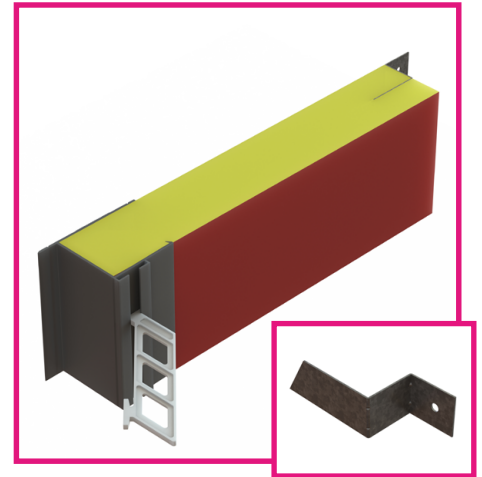

Thermo-loc FR60 150+ Profile and Fixing Flange

### Use

- To close the cavity at external doors, window jambs and sills
- To provide thermal insulation and prevent 'cold bridging'
- To provide a DPC at external doors, window jambs or sills
- 60 minutes fire rating and minimum 15 minutes insulation
- Suitable for cavities over 150mm up to 300mm
- Suitable for timber and masonry walls

### Features and benefits

- Provides an effective DPC and thermal barrier between frame, inner and outer wall leaf
- Thermal conductivity of 0.034W/m<sup>2</sup>K
- Exceeds the minimum thermal resistance path of 0.45m<sup>2</sup>K/W stipulated in 'Part L' accredited construction details
- Rigid profile extrusion allows both first and second fix
- Suitable for flush jambs and sill positions (see Fig.1)
- Durable and resistant to decay
- Insulation option to suit your requirements both thermal and fire rated
- Global warming potential of zero
- Ozone depletion potential of zero

### Quality

- Independently tested by Warrington Fire
- LABC Registered Detail
- Satisfies NHBC Standards
- Manufactured to BS EN ISO 9001 and BS EN ISO 14001
- Complies with Building Regulation Approved Documents C, B, L1 & L2
- Complies with 'Part L' accredited construction details
- Complies with the Scottish Building Standards 'Technical handbook'
- Satisfies BRE document 'Thermal insulation: avoiding risks'
- Meets all relevant British Standards

### Material and colour choice

- Rigid profile extruded in grey UPVC
- Supplied in 2.4 metre lengths
- 50mm Rockfibre mineral wool (FR) insulation 0.034W/m<sup>2</sup>K
- Polyethylene bag encapsulates insulation for moisture protection


### Installation advice

- Can be used in both first and second fix applications
- Cut the cavity closer into required lengths allowing the jamb section to overlap the sill section and to butt the underside of the lintel
- Fit the 4 metal fixing flanges 100mm from each end and 100mm from the centre line. Ensure 2 fixing flanges per insulation slab section.
- In first fix application the cavity barrier should be nailed to the jamb/sill of the door or window frame and the whole assembly built in as work proceeds. Alternatively the barrier can be built in sections using fixing ties as work proceeds.


### FR60 150+ | Over 150mm up to 300mm cavities




Fig.1 Flush jamb



Sill detail

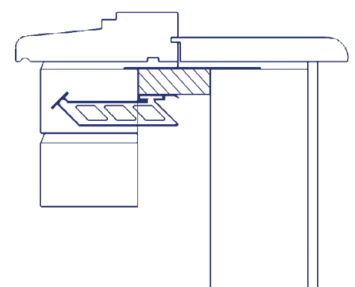

At least 30mm overlap to window frame




- For second fix applications, the cavity barrier is pushed into the open cavity after building work is complete. The compressible nature of the exposed insulation material is used to create a friction fit in the cavity, secure nail fixing is required.
- Joining 'off cut' sections should be minimised for the FR range.

HERMO-LOC

# FR60 150+

## 60-minute fire rated cavity closer

Fire rated barriers for eliminating damp and cold bridging around doors, windows and sills for cavities over 150mm up to 300mm

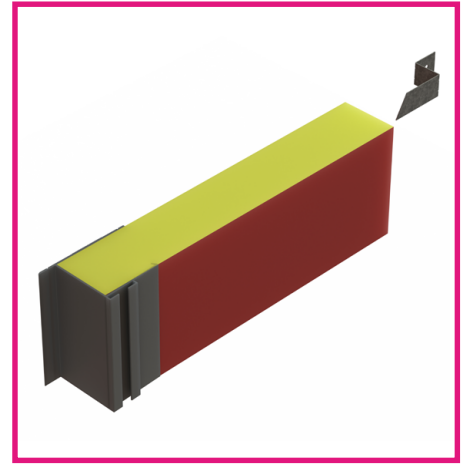

### How to order

- Establish the cavity width and select the correct cavity barrier width, or the next size up to ensure the cavity can be closed
- In jamb and sill applications, first estimate the total length of cavity barrier required, then order the correct number of individual 2.4 metre lengths so limiting joint pieces
- Fixing ties are available for secure fixing if required (particular attention around door openings). Allow for ties fitted at 450mm centres
- Supplied with 4 metal fixing flanges that must be slotted into place.

### Technical considerations

- BRE Document 'Thermal insulation: avoiding risks' and Robust Details stipulate: "When a window or door frame is set back behind the inner face of a dense outer masonry leaf, it should overlap an insulated closer by a minimum of 30mm for BRE exposure zones Sheltered to Severe; but fully rebated check reveals for zones Very Severe".
- With reference to insulation, the products in this range do not use, contain or produce Urea Formaldehyde, CFC's or indeed any of the so called soft CFC's, ie. HCFC's & HFA's. They conform to the Montreal Protocol and have an ozone depletion potential of zero and global warming potential of zero.

### Product codes


Thermo-loc 60-minute fire-rated cavity barriers

Product code	Description	Cavity width	Length	Pack quantity	Lead time
FR60/175	Thermo-loc FR60 150+	175mm	2.4m	2	7-10 working days
FR60/200	Thermo-loc FR60 150+	200mm	2.4m	2	7-10 working days
FR60/225	Thermo-loc FR60 150+	225mm	2.4m	2	7-10 working days
FR60/250	Thermo-loc FR60 150+	250mm	2.4m	2	7-10 working days
FR60/275	Thermo-loc FR60 150+	275mm	2.4m	2	7-10 working days
FR60/300	Thermo-loc FR60 150+	300mm	2.4m	2	7-10 working days
3322*	Fixing flange - 4 pack	-	50mm	4	Next working day
CCFIX	Fixing ties - 100 pack	-	-	100	Next working day

\*1 pack supplied per length of Thermo-loc FR60 150+ cavity closer profile

Thermo-loc FR60 150+ Profile and Fixing Flange

### FR60 150+ fixing flanges installation

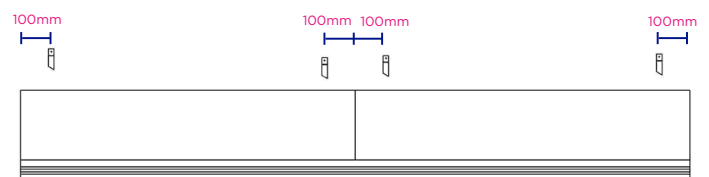

### Bill of quantity

F30 Accessories/sundry items for brick/block/stone walling  
Clause

180 | CAVITY CLOSURES FOR CLOSING AROUND WINDOW & DOOR OPENINGS

- Manufacturer: Timloc Building Products, Timloc House, Ozone Park, Howden, East Yorks. DN14 7SD. T: 01405 765 567, W: www.timloc.co.uk
- Reference:..eg. FR60/200 (Thermo-loc FR60 150+, 2.4m, 200mm cavity)
- Accessories: Fixing ties available, 6 No. per 2.4m cavity barrier.