

3M | 6M INTEGRATED DRY FIX RIDGE KITS

DATASHEET

Convenient mechanical fix solution for roof ridge installations

Use

- Most types of slate, concrete or clay roof tiles.
- Round or angled ridge tiles.
- Most pitched roof types from 15-55°.
- New build and retro-fit projects.

Features & Benefits

- Fixing screws, washers and clamping plates.
- Ridge union with integrated clips compatible with ridge tiles up to 18mm thickness.
- Universal ridge batten strap for ease and flexibility.
- Long lasting, reliable and virtually maintenance free.
- Protects against wind uplift, water ingress and general deterioration.
- Provides 5000mm²/m (5mm continuous) ridge ventilation.
- Easy, fast, clean and generally safer mortar free installation.
- Water resistant yet air permeable membrane roll.
- Strong, malleable and corrosion resistant aluminium flashing secured to roll.
- 55mm wide ridge union provides additional water bar protection.
- Assurance of stainless steel clamping plates.
- Maintains consistently smart appearance.
- Not impacted by building settlement.
- Helps prevent entry of large insects, birds and vermin into the roofline.

Quality

- Helping to meet:
 - BS 5534 Code of practice for slating and tiling.
 - BS 5250 Code of practice for control of condensation in buildings.
- Complies with all other relevant regulations and standards.
- Independently tested and complies with BS 8612.

Material & Colour

- Ridge unions manufactured from UV protected and colour fast polypropylene.
- Water resistant and ventilated roll membrane with attached self-adhesive and black aluminium flashing (colour may vary from pictured).
- Galvanised steel ridge batten straps.
- Stainless steel screws and clamping plates (colour may vary from pictured).
- Available in black only.

Product Codes

Description	Colour	Pack Quantity	Lead Time	Product Codes
3m roll out dry fix ridge kit	Black	1	Next Working Day	53700
6m roll out dry fix ridge kit	Black	1	Next Working Day	54703



Components Supplied in the Pack

3m Integrated Dry Fix Ridge Kit

- 1 x 3m vent roll membrane with self-adhesive flashing
- 7 x fixing screws, washers and clamping plates
- 7 x ridge unions with integrated clips
- 5 x ridge batten straps


6m Integrated Dry Fix Ridge Kit

- 1 x 6m vent roll membrane with self-adhesive flashing
- 13 x fixing screws, washers and clamping plates
- 13 x ridge unions with integrated clips
- 10 x ridge batten straps

How to Order

- Order 1 pack per 3m or 6m roof ridge length.
- Sequential packs can be installed together.
- Please allow for a minimum roll membrane overlap of at least 150mm.

Product Dimensions

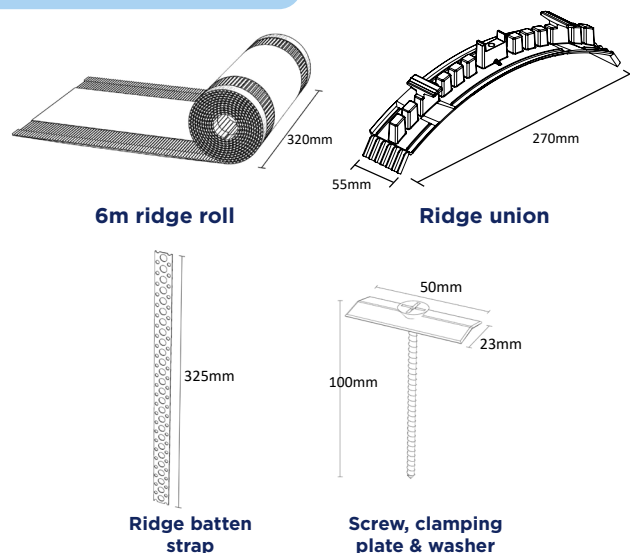

Installation Advice

- Please refer to timloc.co.uk for recommended installation guidance