



by **timloc**

6M DRY FIX CLAY RIDGE KIT

DATASHEET

Convenient mechanical fix solution for roof ridge installations

Use

- Most types of clay roof tiles.
- Round or angled ridge tiles.
- Most pitched roof types from 15-55°.
- New build and retro-fit projects.

Features & Benefits


- Preassembled fixing screws and clamping plates.
- Ridge union with adjustable clip positions to suit a range of clay ridge tile thicknesses (30mm max).
- Universal ridge batten strap for ease and flexibility.
- Long lasting, reliable and virtually maintenance free.
- Protects against wind uplift, water ingress and general deterioration.
- Provides 5000mm²/m (5mm continuous) ridge ventilation.
- Easy, fast, clean and generally safer mortar free installation.
- Water resistant yet air permeable membrane roll.
- Strong, malleable and corrosion resistant aluminium flashing secured to roll.
- 55mm wide ridge union width provides additional water bar protection.
- Assurance of stainless steel clamping plates.
- Maintains consistently smart appearance.
- Not impacted by building settlement.
- Helps prevent entry of large insects, birds and vermin into the roofline.

Quality

- Helping to meet:
 - BS 5534 Code of practice for slating and tiling.
 - BS 5250 Code of practice for control of condensation in buildings.
- Complies with all other relevant regulations and standards.
- Independently tested and complies with BS 8612.

Material & Colour

- Ridge unions and clips manufactured from UV protected and colour fast polypropylene.
- Water resistant and ventilated roll membrane with attached self-adhesive and coloured aluminium flashing (colour may vary from pictured).
- Galvanised steel ridge batten straps.
- Stainless steel screws and clamping plates (colour may vary from pictured).
- Available in black only.
- All kits are supplied with black ridge unions and clips.

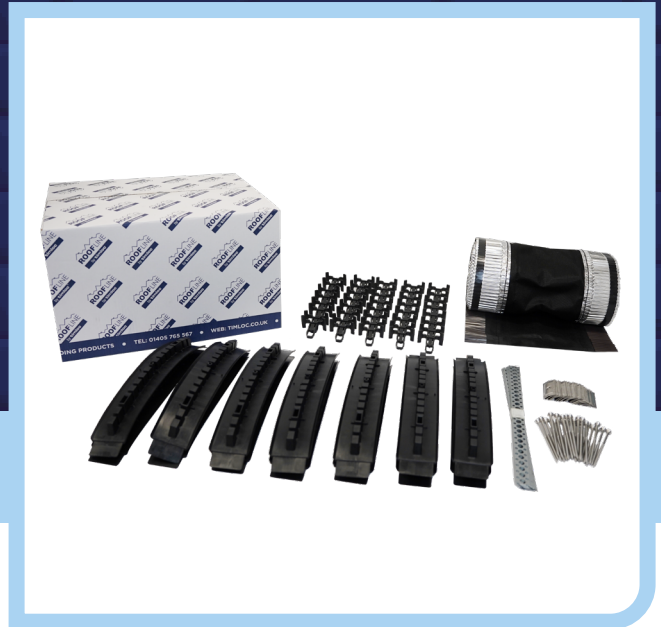


Components Supplied in the Pack

- 1 x 6m vent roll membrane with self-adhesive flashing
- 20 x fixing screws and clamping plates
- 20 x ridge unions
- 40 x ridge union clips
- 10 x ridge batten straps

How to Order

- Select the relevant 6m roll out dry fix ridge kit colour for the project.
- Order 1 pack for roof hip lengths up to 6m.
- Sequential packs can be installed.
- Please allow for a minimum roll membrane overlap of at least 150mm.
- Allow for minimum hip tray overlap of at least 150mm.

Product Dimensions

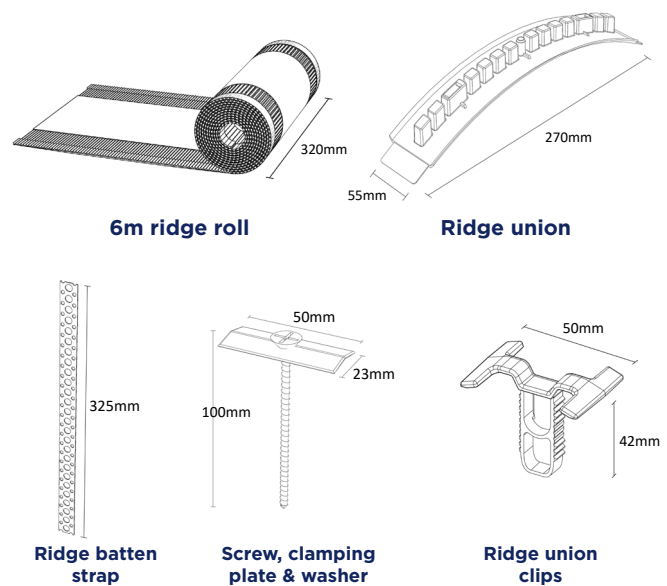

Installation Advice

- Please refer to timloc.co.uk for recommended installation guidance

Product Codes

Description	Colour	Pack Quantity	Lead Time	Product Codes
6m dry fix clay ridge kit	Black	1	Next Working Day	54713
20x ridge unions & 40x ridge clips	Black	1	Next Working Day	54715
20x fixing screws & clamping plates	Silver	1	Next Working Day	54716