

Pb FREE LEAD-FREE FLASHING

DATASHEET

The lead alternative high-performance, low-cost aluminium flashing

Use

- Same applications as traditional lead flashing including flat roof connection, dormers, valley gutters, step and cover flashing, cavity walls and apron flashing.
- Can withstand any climate worldwide (-40°C / +90°C).

Features & Benefits

- Versatile and durable.
- 5m roll length.
- Flexible and lightweight.
- Easy to cut and repair.
- Two options to choose from:
 - Unique dimpled profile to provide additional strength
 - Smooth profile for easy manipulation

Quality

- Can withstand any climate worldwide (-40°C / +90°C).

Composition and Colour

- Aluminium flashing.
- Available in Grey only.

Installation Advice


- PbFree is installed and worked in a similar way to traditional lead flashing.
- Minimum working temperature is 5°C.
- Can be applied and worked in any direction using a mallet, roller or by hand.
- Can be cut using scissors or knife.
- Before fixing to any building material surface the protective paper should be left in place until the final shape and position of the flashing is determined.
- If the building material surface is unstable then bituminous primer should be applied.
- Any jointing detail should have a minimum overlap of 100mm.

Product Codes

Description	Width	Length	Colour	Quantity	Lead Time	Product Codes
PbFree Lead-free Flashing	150mm	5m	Grey	1	Next Working Day	LF150
PbFree Lead-free Flashing	300mm	5m	Grey	1	Next Working Day	LF300
PbFree Lead-free Flashing	450mm	5m	Grey	1	Next Working Day	LF450
Smooth PbFree Lead-free Flashing	150mm	5m	Grey	1	Next Working Day	SLF150
Smooth PbFree Lead-free Flashing	300mm	5m	Grey	1	Next Working Day	SLF300
Smooth PbFree Lead-free Flashing	450mm	5m	Grey	1	Next Working Day	SLF450



LF300

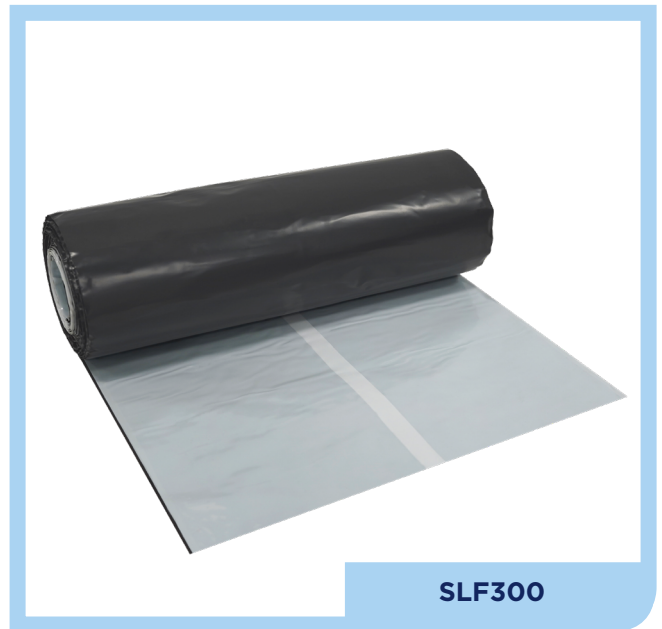

SLF300