


# ROOFLINE

by **timloc**

## 6M EAVES VENT PACK INSTALLATION ADVICE

Easy-to-fit ventilation system in one pack

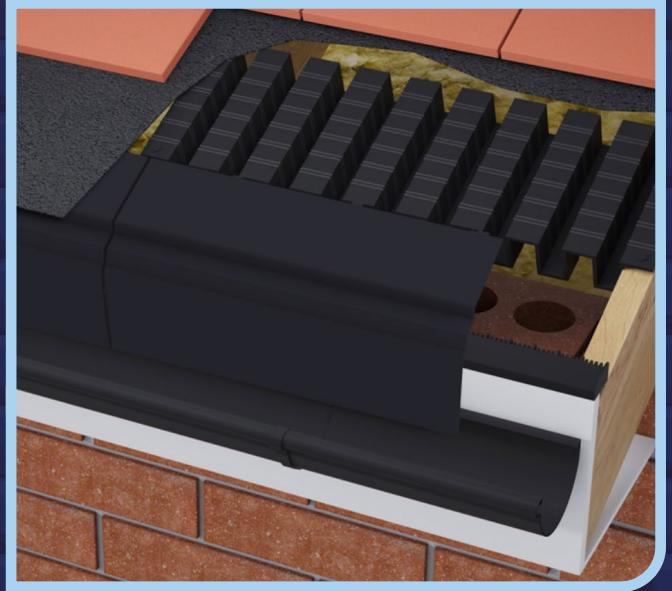

-  Satisfies all NHBC requirements
-  Manufactured to BS EN ISO 9001 and BS EN ISO 14001
-  Complies with all relevant Building Regulations
-  Meets all relevant British Standards

### Roll form eaves vents

1.

Unroll the ventilator along the rafters along the full length of the eaves. Position centrally above the wall plate. This is the narrowest part of the roof where the roof insulation is most likely to constrict the airflow.

2.

Push the corrugations down over the top of the rafters and secure using clout nails or staples.

### Over fascia vents

1.

Fix ventilators to the top edge of the fascia board using screws or nails through the fixing holes provided. Ventilation must be provided for the full length of the eaves and along both sides of the building to create a cross flow ventilation action. Felt support trays fit directly on top of the over fascia vent.

2.

Secure with clout nails driven into the top of the fascia board through the slots in the over fascia vent. Ensure each panel is allowed to overlap the next. Allow the rear of the panel to lay back on to the rafters.

Scan or click to view the product datasheet

