




Adapt-Air

# INSTALLATION ADVICE

Simple to install pre-assembled sets, which quickly and conveniently adapts extraction ductwork to terminate at a standard plastic airbrick.

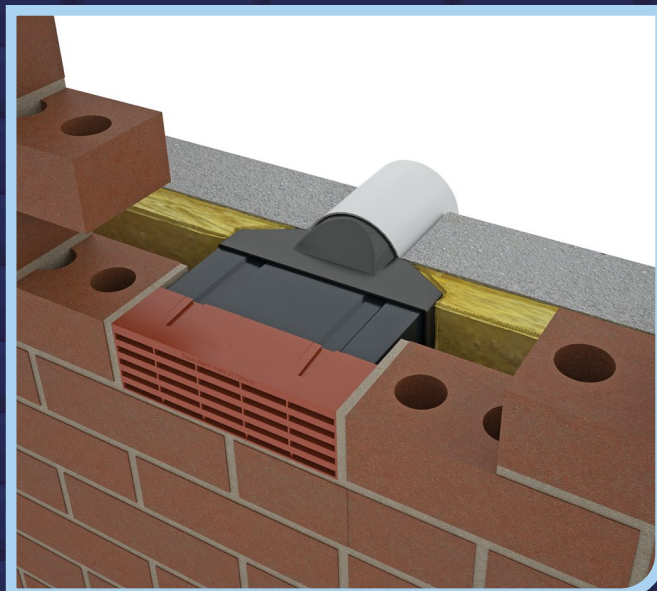

Helping to meet Building Regulation Part F



Equivalent area marking to front face of airbrick to comply with BS EN 13141-1



Manufactured to BS EN ISO 9001

1.

Build in the set's airbrick (to replace a regular brick) as normal as brick and blockwork proceeds.

2.

The installed position and level of the set is determined by the extraction fan connections. The kit must be installed with a slight angle to the external leaf to allow for moisture drainage.

3.

The set can be flush or project beyond the inner wall leaf to allow for the fitting of additional ducting or an extraction fan.

4.

The cavity wall construction will determine most suitable option length kit required.

5.

As with all through cavity wall components install a DPC cavity tray, with wall weep and stop ends, above the installed adapter set to collect any water ingress. We recommend the Inter-loc 4 horizontal cavity tray and 1143 or Invisiweep.

Scan or click to view the product datasheet

