


TOP HATS &
FLEXIBLE TOP HATS

INSTALLATION ADVICE

**For sealing to a gas barrier and at the
intersection of pipe projections**

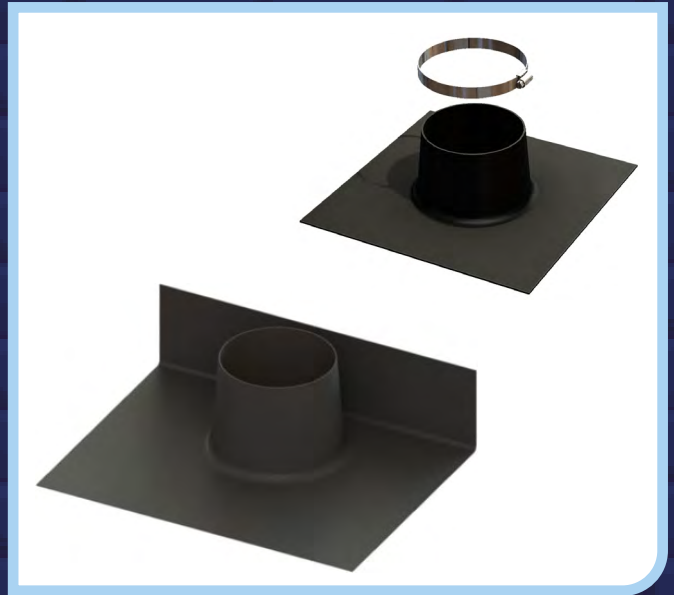

-  Manufactured to BS EN ISO 9001 and BS EN ISO 14001
-  Satisfies all NHBC requirements
-  Meets BRE requirements
-  Complies with Building Regulation Approved Documents C1 and C2

1.

Units will require tape and seal - tape sold separately. Use GTAPE01 to make the seal between joint surfaces. Use GTAPE02 to seal upper surface to minimise lap lifting if used in concrete floors

Scan or click to view the
product datasheet

