

6M DRY FIX HIP KIT

DATASHEET

Convenient mechanical fix solution for roof hip installations

Use

- Most types of slate, concrete or clay hip tiles.
- Round or angled hip tiles.
- Most pitched roof types from 15-55°.
- New build and retro-fit projects.

Features & Benefits

- Preassembled fixing screws and clamping plates.
- Ridge union with adjustable clip positions for ridge tile thickness.
- Universal ridge batten strap for ease and flexibility.
- Long lasting, reliable and virtually maintenance free.
- Protects against wind uplift, water ingress and general deterioration.
- Provides 5000mm²/m (5mm continuous) ridge ventilation.
- Easy, fast, clean and generally safer mortar free installation.
- Water resistant yet air permeable membrane roll.
- Strong, malleable and corrosion resistant aluminium flashing secured to roll.
- 55mm wide ridge union width provides additional water bar protection.
- Assurance of stainless steel clamping plates.
- Maintains consistently smart appearance.
- Not impacted by building settlement.
- Helps prevent entry of large insects, birds and vermin into the roofline.

Quality

- Helping to meet:
 - BS 5534 Code of practice for slating and tiling.
 - BS 5250 Code of practice for control of condensation in buildings.
- Complies with all other relevant regulations and standards.
- Independently tested and complies with BS 8612.

Material & Colour

- Ridge unions & clips manufactured from UV protected & colour fast polypropylene.
- Water resistant and ventilated roll membrane with attached self-adhesive aluminium flashing (colour may vary from pictured).
- Galvanised steel ridge batten straps.
- Stainless steel screws and clamping plates (colour may vary from pictured).
- Available in black.
- All kits are supplied with black ridge unions and clips.
- Hip trays recycled PVC - grey*

Product codes on next page.




Components Supplied in the Pack

- 1 x 6m vent roll membrane with self-adhesive flashing.
- 13 x fixing screws and clamping plates.
- 13 x ridge unions.
- 26 x ridge union clips.
- 10 x ridge batten straps.
- 6 x hip trays.

How to Order

- Order 1 pack for roof hip lengths up to 6m.
- Sequential packs can be installed.
- Please allow for a minimum roll membrane overlap of at least 150mm.
- Allow for minimum hip tray overlap of at least 150mm.

Product Dimensions

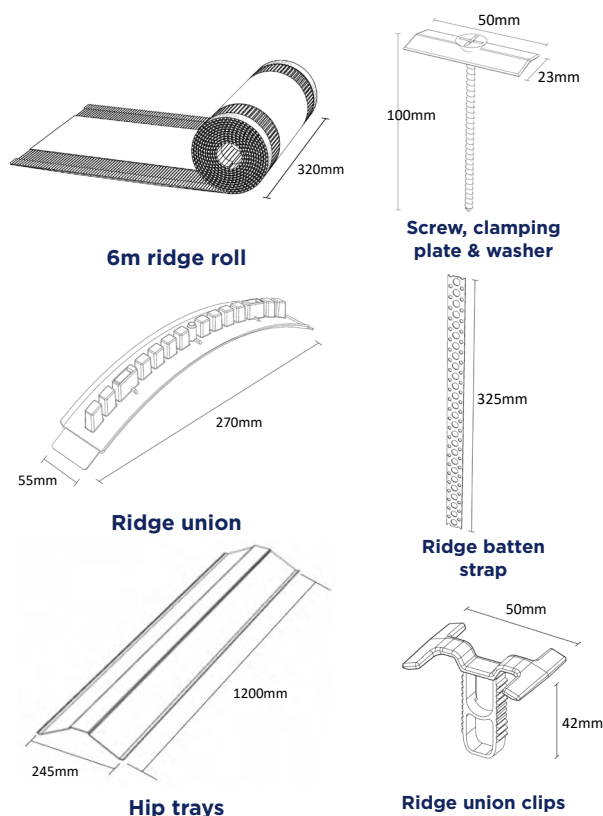

Installation Advice

- Please refer to timloc.co.uk for recommended installation guidance

Product Codes

Description	Colour	Pack Quantity	Lead Time	Product Codes
6m dry fix hip kit	Black	1	Next Working Day	54710
6x dry fix hip tray only pack	Grey*	1	Next Working Day	44623
13x ridge unions & 26x ridge clips	Black	1	Next Working Day	54618
13x fixing screws & clamping plates	N/A	1	Next Working Day	54626

*Please note colour may vary for the hip trays.