

# FRSTOP

## FIRE-RATED CAVITY STOP SOCK

# DATASHEET

### Fire-rated thermal and acoustic cavity stop sock

#### Use

- To restrict the spread of flames within external masonry.
- To further minimise the effect of flanking noise pollution at wall junctions.

#### Features & Benefits

- FRstop cavity stop socks are lengths of low resin, non-combustible, rockfibre mineral wool sleeved in 35 micron polythene for on-site weather protection.
- 1 hour fire integrity and minimum 15 minute insulation.
- Available in standard widths of 50, 75, 85, 90, 100, 115, 125 and 150mm.
- Also available to suit cavity widths of up to 300mm.
- Special cavity widths are available on request up to 300mm.


#### Quality

- Satisfies all NHBC requirements.
- Complies with Building Regulations Approved Document B.
- Meets all relevant British Standards.
- Independently tested by Warringtonfire.
- Meets the requirements of the Robust Details.

#### Material & Colour

- Manufactured using Rockfibre mineral wool
- Rockfibre uses no CFC's, HCFC's in the manufacturing process
- Thermal conductivity of Rockfibre insulation 0.037w/mK
- Bag colour according to size range:

Product Code	Bag Colour
FRSTOP50	Yellow ●
FRSTOP75 - 100	Blue ●
FRSTOP115 - 140	Green ●
FRSTOP150 - 200	Red ●
FRSTOP210 - 300	Blue ●

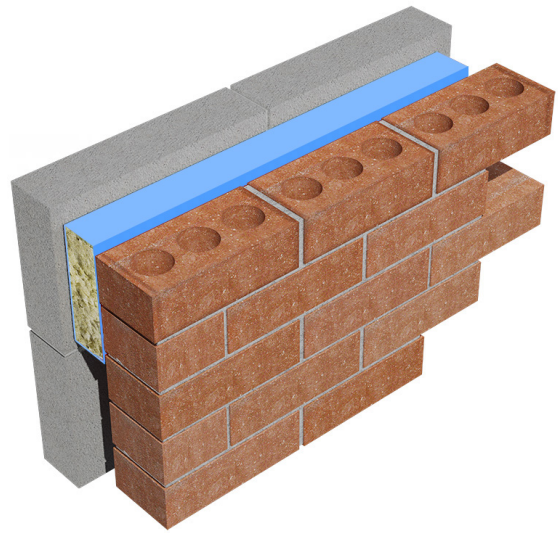

#### How to Order

- To calculate quantities divide the overall length of the required cavity wall run by 1.2m, allow an additional unit for each corner for cutting.
- Always round up to the next whole number.
- Determine and stipulate the cavity width that FRstop needs to suit.

#### Bill of Quantity

##### F30 Accessories/sundry items for brick/block/stone walling Clause 370 | PREFORMED CAVITY TRAY / ACCESSORIES

- Manufacturer: Timloc Building Products, Timloc House, Ozone Park, Howden, East Yorkshire, DN14 7SD. T: 01405 765567 W: www.timloc.co.uk
- Types(s) and location(s): FRstop - thermal and acoustic fire stops to be installed vertically and horizontally as work proceeds. Position where a party wall meets the cavity wall or at floor levels, supplied in 1.2m lengths and butt jointed.
- Reference: FRSTOP

**NB. Non standard cavity sizes up to 300mm are available to special order**

#### Installation Advice

- FRstop is designed to friction fit within the cavity and is easily installed both vertically and horizontally into the cavity during construction. Care should be taken to ensure butt joints are closely fitted and the cavity sock fully fills the cavity.
- This method should be incorporated with a preformed horizontal cavity tray (refer to Technical Department for appropriate type) and proprietary wall weep vents (1143) at 900mm centres to prevent water ingress from bridging the cavity

## Product Codes

Product Code	Description	To Suit Cavity Width	Bag Colour	Dimensions	Pack Quantity
FRSTOP50	FRstop Fire-Rated Cavity Stop Sock Masonry 50mm Cav x 1.2m	50mm	Yellow	65 x 65 x 1200mm	20
FRSTOP75	FRstop Fire-Rated Cavity Stop Sock Masonry 75mm Cav x 1.2m	75mm	Blue	85 x 85 x 1200mm	18
FRSTOP85	FRstop Fire-Rated Cavity Stop Sock Masonry 85mm Cav x 1.2m	85mm	Blue	100 x 85 x 1200mm	12
FRSTOP90	FRstop Fire-Rated Cavity Stop Sock Masonry 90mm Cav x 1.2m	90mm	Blue	100 x 85 x 1200mm	12
FRSTOP100	FRstop Fire-Rated Cavity Stop Sock Masonry 100mm Cav x 1.2m	100mm	Blue	110 x 100 x 1200mm	1
FRSTOP115	FRstop Fire-Rated Cavity Stop Sock Masonry 115mm Cav x 1.2m	115mm	Green	130 x 100 x 1200mm	1
FRSTOP125	FRstop Fire-Rated Cavity Stop Sock Masonry 125mm Cav x 1.2m	125mm	Green	140 x 100 x 1200mm	1
FRSTOP150	FRstop Fire-Rated Cavity Stop Sock Masonry 150mm Cav x 1.2m	150mm	Red	160 x 120 x 1200mm	1